## Operating Instructions

1. **Intended** use. This Power Tool is intended for industrial applications, for cutting sheet metal (maximum capacity is indicated in the Specifications), for use with cutting jaws and cutting blades which are indicated in these operating instructions or recommended by DRÄCO

2. **Initial Operation**
   Observe the rated voltage: The voltage of the power source must match that given on the nameplate of the machine. Chargers for 230V can also be operated on 220 V power sources.

   **Switching ON and OFF**
   **Switching ON: Slide the switch (93) forward**
   **Switching OFF: Slide the switch (93) to the rear.**

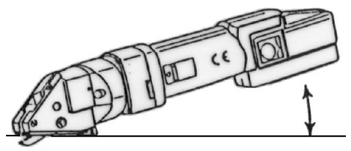

2. **The material to be cut must always be free of oil or grease.** Always place the machine flat on the work piece

3. **Cut-outs:** Drill a starting hole with a 12-14 mm diameter drill. **Circular cuts:** Always cut counter clockwise and from left to right.

4. Do NOT cut sheet metal along welding points. Do NOT cut multi layer sheets, which exceed the maximum cutting capacity.

5. Battery Change
   Before using the cordless tool, charge a new or empty battery. The full capacity is reached, after charging the battery about 4-5 times.

**Insert the battery (A)**
Insert the battery from the back, until it clicks into place.



Abb. A



Abb. B

**Remove battery (B)**
Press both stop locks together, take battery off, see arrow.

6. **For inside cutting**, the shortest curve possible has a radius of 200 mm (±8”). If cutting a radius with the right hand, cut from right to left. The outside radius is unlimited.

7. For **cutting out** curved or circular inside patterns, a 14 mm (± 1/2 “) hole, or a punched slot should be made to insert the centre cutter.

8. If after cutting, a **small strip** remains this can easily be trimmed off to the exact measurement, without leaving a burr or any distortion of the material. Just one side of the cordless tools can be used for cutting also (e.g. along a marked line). Lift the power tools out of the shavings while the motor is running. Cut off longer shavings.

9. Both knife and jaws can be sharpened. After being sharpened or replaced, the knife at it’s lowest point should protrude the jaws by approximately 3 mm. The knife should have approximately 0,05 mm (0,005”) play on each side of the jaws, centring the cutter with spacing shims supplied.

10. Every 200 operating ours have the cutting blade and cutting jaws sharpened at a specialist workshop.

11. **<u>Ensure that the material to be cut is free of oil and grease.</u>**

### Care and Maintenance

Before working on machine disconnect from power supply by removing plug from socket.
Always keep the machine and the ventilation slots clean.
Oil the knife pin at regular intervals.
If the machine should happen to fail despite the care taken in manufacture and testing, repair should be carried out by an authorised customer services agent for DRÄCO power tools.

### CE-Declaration of conformity

We declare under our sole responsibility that this product is in conformity with the following standards.
EC 98/37, EC 93/ 68 EWG, EC 04/108 EC, or standardisation documents DIN EN ISO 12100-1, DIN EN ISO 12100-2, EN 50 144, EN 55 014

CE 09 Max Draenert

### Warranty

DRÄCO tools carry a guarantee of 12 months from date of delivery.
Damage attributable to normal wear and tear, overload or improper handling will be excluded from the guarantee. (e.g. blades/knifes and jaws)
In case of complaint please send the machine, **undismantled**, to your dealer or the DRÄCO Service Centre for electric power tools.

### Environnemental protection

**Recycling raw materials instead of waste disposal.**
Machine, accessories and packaging should be sorted for environment-friendly recycling.

# Operating Instructions for the metal-shears AK 3010, AK 3013, AK 3017

**To avoid any disturbance please read the following instructions:**

**For your safety:**

**1 Safe operation of this machine is possible only when the operating instructions and the safety precautions are read completely and the instructions contained therein are strictly observed.**

**2** The machine must not be used when damp and must not be operated in a wet environment.

**3** Always inspect cable and plug before using machine. Only have damage repaired by a qualified professional. Put the plug into the mains socket only when the machine is switched off.

**4+5** Always wears protective goggles, protective gloves and heavy-duty shoes when working.

l Do not carry the machine by the cable.
l Always remove the plug from the power supply socket before carrying out any work on the machine, when interrupting work and when not using the machine.
l Always place the cable to the rear away from the machine.
l Apply the machine to the sheet metal only when switched on.
l Always provide for secure footing when working.
l Firmly clamp the work piece if it dose not remain stationary from its own weight.
l The knife should not rub on the jaws: Possible danger of cutting tool breakage.
l Do not exceed the maximum allowable material thickness especially when cutting over doublers, folded joints or welded seams.

**F** **For further notes on safety refer to enclosed sheet**

**Technical Data:**

| **DRÄCO metal-shear** | | type | **AK 3010** | **AK 3013** | **AK 3017** |
|---|---|---|---|---|---|
| **max. thickness** | | | | | |
| steel | 400 N/mm² | mm/ga. | **1,0 / 19** | **1,3 / 18** | **1,6 / 17** |
| stainl. steel | 600N/mm² | mm/ga. | **0,7 / 21** | **1,0 / 19** | **1,3 / 18** |
| stainl. steel | 800 N/mm² | mm/ga. | **0,4 / 25** | **0,7 / 21** | **1,0 / 19** |
| non ferro | 250 N/mm² | mm/ga. | **1,5 / 17** | **2,0 / 14** | **2,5 / 12** |
| tightest radius | | ±mm/” | **50 / 2** | **100 / 4** | **140 / 5½** |
| working speed | | ±m/min | **3,5** | **3,5** | **3,5** |
| strokes | | min $^{-1}$ | **1800** | **1800** | **1800** |
| weight incl. battery | | kg | **2,1** | **2,1** | **2,1** |

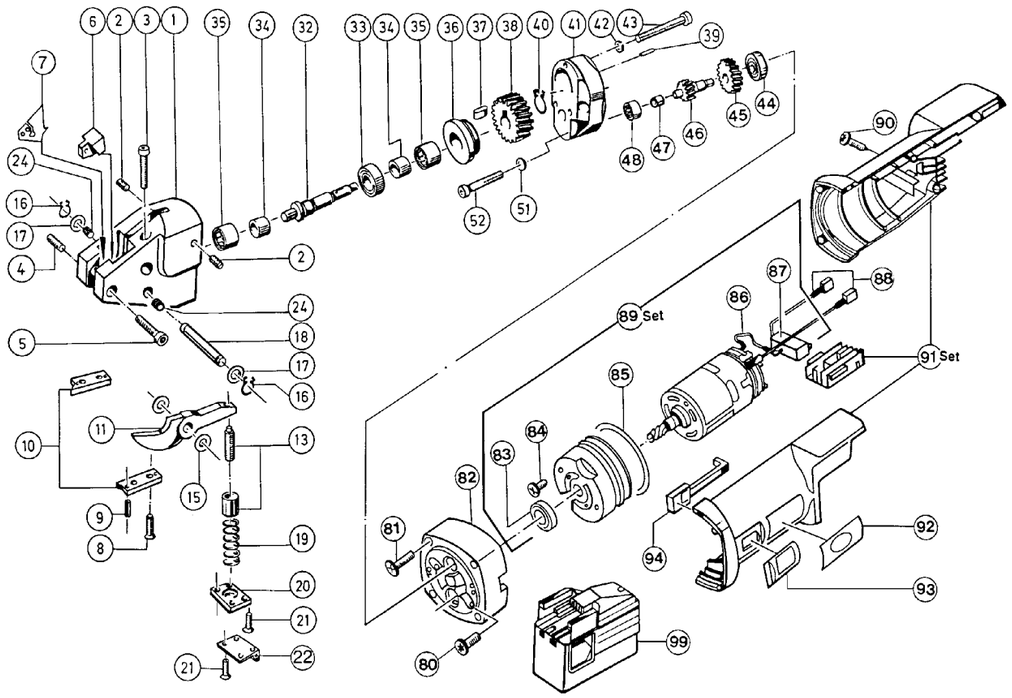


## SERVICE TIPS

**Before working on machine disconnect from power supply by removing plug from socket.**
**Wear protective glasses!**

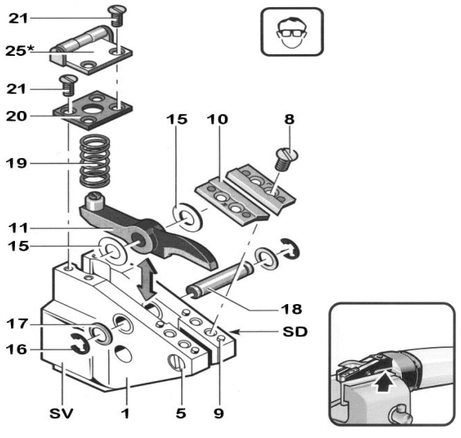




*Optional

1. One drop of oil between knife (11) and head-casting (1) keeps the spacing shims (15) in place.
2. Dismantle Spring cover (20) and take spring out (19)
3. Take circlip (16) and washer (17) off.
4. Push knife pin (18) out of casting.
5. Take knife out of housing.
6. ⚠ Attention, do not exchange the spacing shims (15).
7. Place the knife inside the housing feed shims in on one side and push knife pin (18) into housing up to the middle of the knife.
8. Feed the shims on the other of the knife.
9. Push knife pin in completely, and secure washer (17) and circlip (16) again.
10. Assemble spring (19) and spring cover (20).
11. Between the knife (11) and the jaws (10) should be some distance, approximately 0,05 mm on each side. Knife (11) must be placed tight in the head casting.
12. Adjustment for the play between the jaws. (a): 0,1 - 0,15 mm.




13. If knife has contact with the jaws on both sides, adjust with screws in the head casting.
    If a burr is on the material, adjust the space between the knife and the jaws
14. Replace jaws with a new set, loosen 4 screws (8) take jaws (10) and pins (9) off, assemble again and tighten with the screws.

## Spare Parts List for DRÄCO Metal Shear AK 3010, AK 3013, AK 3017

| Pos. no. | Order no. | Item | Pc. | Pos. no. | Order no. | Item | Pc. |
|---|---|---|---|---|---|---|---|
| | 33010 | Shearhead AK 3010 compl. assembl. 1-43, 48, 51, 52 | | 35 | 10300 | Needle Bearing | 2 |
| | 33013 | Shearhead AK 3013 compl. assembl. 1-43, 48, 51, 52 | | 36 | BG10450 | Cap for Needle Bearing Pos. 35+36 | 1 |
| | 33017 | Shearhead AK 3017 compl. assembl. 1-43, 48, 51, 52 | | 37 | 10006 | Key | 1 |
| | 33018 | Driveshaft complete 34-40 | | 38 | 13051 | Gear | 1 |
| | 33019 | Pinion complete 44-47 | 1 | 39 | 13036 | Pin | 1 |
| 1 | BG20241 | Head casting Pos. 1-3,24,35 | 1 | 40 | 10009 | Circlip | 1 |
| 2 | 81239 | Tap Screw | 1 | 41 | 13046 | Gear Case Cover | 1 |
| 3 | 81263 | Screw | 1 | 42 | 81249 | Securing Washer | 3 |
| 4 | 81089 | Tap Screw | 1 | 43 | 81262 | Flat Filister Head Screw | 3 |
| 5 | 81272 | Flat Filister Head Screw | 1 | 44 | 13039 | Ball Bearing | 1 |
| 6 | 10002 | Spacing Block | 1 | 45 | 13540 | Pinion | 1 |
| 8 | 81286 | Flat Head Screw | 4 | 46 | 13041 | Gear | 1 |
| 9 | 81248 | Pin | 4 | 47 | 13042 | Sleeve | 1 |
| | | | | 48 | 13043 | Needle Bearing | 1 |
| 10 | 13574/1 | Set of Jaws AK 3010 | 1 | 51 | 81243 | Securing Washer | 2 |
| 11 | 01011 | Knife SD5 AK 3010 | 1 | 52 | 81031 | Hex Socket Screw | 2 |
| | | | | 80 | 33080 | Screw | 1 |
| 10 | 10600 | Set of Jaws AK 3013 | 1 | 81 | 33081 | Screw | 1 |
| 11 | 01001 | Knife 1001 AK 3010 | 1 | 82 | 33082 | Connection Flange | 1 |
| | | | | 83 | 10038 | Ball Bearing | 1 |
| 10 | 13074 | Set of Jaws AK 3017 | 1 | 84 | 33084 | Screw | 1 |
| 11 | 01013 | Knife 1013 AK 3017 | 1 | 85 | 33085 | O-Ring | 1 |
| | | | | 86 | 33086 | Cable | 1 |
| 13 | 35566 | Knife adjusting screw lockring | 1 | 87 | 33087 | Switch | 1 |
| 15 | BG12400 | Spacing Shims | 1 | 88 | 33088 | Cable | 1 |
| 16 | 81275 | Circlip | 2 | 89 | 33089 | Motor Set 83-88 | 1 |
| 17 | 81072 | Washer | 2 | 90 | 33090 | Screw | 1 |
| 18 | BG12500 | Knife Pin Set | 1 | 91 | 33091 | Motorhouse Set | 1 |
| 19 | 12200 | Spring | 1 | 92 | 33092 | Rating Plate | 1 |
| 20 | 12300 | Spring Cover | 1 | 93 | 33093 | Switch Pad | 1 |
| 21 | 81285 | Flat Head Screw | 4 | 94 | 33094 | Guide piece | 1 |
| 22 | 10077 | Supporting roller in metal | 1 | 99 | 31298 | Power Akku Bxs 12 | 1 |
| 24 | 17900 | Knife Pin Bushing Ø 10mm | 2 | | | | |
| 24a | 17911 | Knife Pin Bushing Ø 11mm | 2 | | 31299 | Quick Charger SRC | |
| 32 | BG33018 | Driveshaft Pos. 32-40 | 1 | | 31297 | Charger RC 60 Min. | |
| 32 | BG10004 | Excentric Drive Shaft Pos.32-34, 37+40 | 1 | | | | |
| 32 | 10004 | Excentric Drive Shaft | 1 | | | | |
| 33 | 10250 | Ball bearing | 1 | | | | |
| 34 | 100005 | Sleeve | 2 | | | | |

**Max Draenert GmbH & Co.KG** **Electric - Cordless - Pneumatic Tools - Machines** **Germany**

Factory I: **Administration** D-73777 Deizisau P.O.Box 1120 Phone **+49-7153-8217-0**
**Manufacturing Shears** D-73779 Deizisau Gutenbergstrasse 15-17 Fax **+49-7153-8217-66**
Factory II: **Manufacturing Roofing System** D-73779 Deizisau Seewiesenweg 1

Internet: http://www.dracotools.com e-mail: draenert@dracotools.com